

# MELTRIC Corporation

## The best in industrial wiring devices



At MELTRIC Corporation, our only business is electrical plugs and receptacles. We are focused on providing our customers with the best overall value by offering the safest, highest quality and most reliable plugs and receptacles, and by backing them with outstanding service and support.

## DS60 Switch-Rated Plugs & Receptacles – 60 A

### Dead Front Construction

Most MELTRIC products feature dead front construction, which greatly enhances safety by eliminating any unintended access to live parts. On most MELTRIC products, the dead front is accomplished with a safety shutter that can be opened only by an appropriate mating plug. The live receptacle contacts can only be accessed by the plug, after its insertion into the receptacle. The design of the product also ensures that the plug contacts are dead before the user can remove the plug from the receptacle.

By contrast, pin and sleeve and twist-type devices do not have a safety shutter. Access to live receptacle contacts is possible, and on some devices the plug contacts may be live and accessible when the plug is being removed.




### Lockout-Tagout Capability

Most MELTRIC plugs and receptacles facilitate compliance with OSHA lockout-tagout requirements. Only a lock or lockout hasp and tag are needed to ensure that the plug is properly locked out and tagged out. Additional mechanisms are not required because the lockout provision is integral to the device – it is always available when you need it. On most models the lockout provision is a simple 5/16" hole in the plug shroud that facilitates the insertion of a typical padlock or lockout hasp that prevents the plug from being inserted into a receptacle.

An optional provision for locking out MELTRIC receptacles is also available. In most cases this is accomplished via a specially machined hole in the receptacle casing which allows insertion of a padlock to secure the receptacle lid in a closed position. This same optional provision can be used to prevent removal of the plug if desired.

By comparison, in order to lockout most competitive pin and sleeve type plugs, an additional third-party 'lockout shield' or 'plug cap' is required. These devices can be expensive and are often times lost, broken, or not available when you need them.

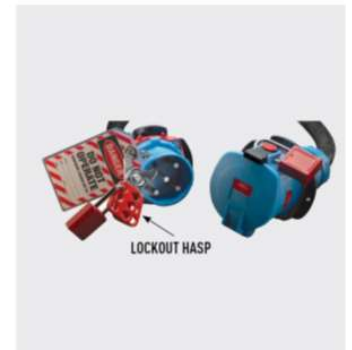

LOCKOUT HASP

### Enclosed Arc Chambers

The contacts on most MELTRIC products make and break within enclosed arc chambers. This ensures that the arcing which normally occurs during the making and breaking of the contacts is contained inside the device. This greatly enhances safety and avoids potential injury to users and/or harm to the outside environment.



### Push-Button Circuit Disconnection

To disconnect most MELTRIC products, the user simply needs to press the pawl. This causes the circuit to be disconnected and the plug to be ejected to its rest (off) position in the receptacle. If desired, the user can then remove the plug from the receptacle by rotating it slightly and then withdrawing it. This mode of operation ensures that it is only possible to remove the plug after its contacts have been deenergized.



Toll free 1 800 461 4076  
[www.chesscontrols.com](http://www.chesscontrols.com)

Tel 705 682 2828  
[sales@chesscontrols.com](mailto:sales@chesscontrols.com)

# DS60 Switch-Rated Plugs & Receptacles – 60 A

## UL/CSA Ratings

- Max Amperage & Voltage**  
60 A, 600 VAC
- Switch-Rating (AC Only)**  
Branch Circuit & Motor Circuit Disconnect Switching
- Horsepower Ratings**

120V	1Ø	3 hp
240V	1Ø	5 hp
208V	3Ø	10 hp
240V	3Ø	10 hp
480V	3Ø	25 hp
600V	3Ø	25 hp
- Short Circuit Rating** 100kA  
Close & Withstand Tested with RK1 current limiting fuses sized at 400% of the highest full load motor ampacity.
- Environmental Ratings**  
Type 3R (Standard)  
Type 4X (Optional)
- Temperature Range**  
Min -40°F/Max 140°F  
See pg 258 for temps below -15°F.
- Wiring Capacity**  
Min 10 AWG Max 2 AWG  
Aux Contacts - Max 14 AWG  
Based on THHN wire sizes
- Certifications**  
UL 2682, UL 1682, CSA 182.1

## Receptacle (female)



## Inlet (male)



**!** Don't forget to add installation accessories to your order

## North American UL/CSA Configurations

Voltage	Polarity	Part #		Part #	
		Poly	Metal	Poly	Metal
120V	1P+N+G	33-64165	37-64165	33-68165	37-68165
120 208V	3P+N+G	33-64167	37-64167	33-68167	37-68167
125V	1P+N+G	33-64075	37-64075	33-68075	37-68075
125 250V	2P+N+G	33-64076	37-64076	33-68076	37-68076
208V	2P+G	33-64162	37-64162	33-68162	37-68162
208V	3P+G	33-64163	37-64163	33-68163	37-68163
250V	2P+G	33-64072	37-64072	33-68072	37-68072
250V	3P+G	33-64073	37-64073	33-68073	37-68073
277V	1P+N+G	33-64045	37-64045	33-68045	37-68045
277 480V	3P+N+G	33-64047	37-64047	33-68047	37-68047
347 600V	3P+N+G	33-64147	37-64147	33-68147	37-68147
480V	2P+G	33-64042	37-64042	33-68042	37-68042
480V	3P+G	33-64043	37-64043	33-68043	37-68043
600V	2P+G	33-64142	37-64142	33-68142	37-68142
600V	3P+G	33-64143	37-64143	33-68143	37-68143

For international configurations and ratings (IEC, CE) visit [meltric.com/international-catalog](http://meltric.com/international-catalog) or contact customer service at 800-433-7642.

## Main Options



**Auxiliary/Pilot Contacts**



**Mushroom Pawl**



**Padlock Pawl**



**Closed Lid Configuration**  
Recommended for cord applications to keep lid tucked in to avoid damage.

## Receptacle Options

## Suffix #

## Inlet Options

## Suffix #

With 2 Auxiliary/Pilot Contacts	Recept # - 972	With 2 Auxiliary/Pilot Contacts	Inlet # - 972
With 3 Auxiliary/Pilot Contacts	Recept # - 263	With 3 Auxiliary/Pilot Contacts	Inlet # - 263
With 4 Auxiliary/Pilot Contacts	Recept # - 264	With 4 Auxiliary/Pilot Contacts	Inlet # - 264
Type 4X & Closed Lid Configuration	Recept # - 4X	Type 4X Watertightness	Inlet # - 4X
Straight Insertion	Recept # - 352	Self-Ejecting Plug Release	Inlet # - 338
Self-Ejecting Connector Release	Recept # - 354	With No Lockout Hole	Inlet # - A155
Mushroom Pawl	Recept # - 375	For Auxiliary Switch	Inlet # - NNF*
Padlock Pawl	Recept # - 843		
Padlockable Mushroom Pawl	Recept # - 375-843		
Screw-Type Locking Pawl	Recept # - 845		
Metal Pawl (on Poly Receptacle)	Recept # - 824		
Closed Lid Configuration	Recept # - NC		
With Auxiliary Switch	Recept # - 270+		
180° Opening Lid (metal only)	Recept # - 180++		

**Notes:** \* Order inlet with P+N+G configuration and receptacle with P+G configuration.






**Notes:** + Not UL/CSA listed.  
++ Required when mating to rigid mounted male inlet.

**Order Example:** 480V DS60 + 2 auxiliary contacts  
DS60 Poly inlet 3P+G = 33-68043-972

# INSTALLATION ACCESSORIES – SIZE 4


Unless indicated otherwise, accessories can be used with either poly or metal plugs and receptacles.


## HANDLES

HANDLE w/NPT	Part # Poly	Part # Metal
 1/2"	514P0N05	594P0N05
 3/4"	514P0N07	594P0N07
 1"	514P0N10	594P0N10
 1 1/4"	514P0N12	594P0N12
 1 1/2"	514P0N15	594P0N15

For metal devices only

For available cord grips, see page 167.


POLY HANDLE w/CORD GRIP	Cable Range	Part #
	.680 - .980"	714P0DP4
	.980 - 1.260"	714P0EP4
	1.260 - 1.560"	714P0FP1

METAL HANDLE w/CORD GRIP	Cable Range	Part #
	.750 - .875"	794P0DS1
	.875 - 1.000"	794P0DS3
	1.000 - 1.125"	794P0ES2
	1.250 - 1.375"	794P0FS1
	1.438 - 1.562"	794P0FS2*
	1.562 - 1.688"	794P0FS3*


For metal devices only

\*May require stripping of cable jacket.

POLY HANDLE	Cable Range	Part #
	.51 - 1.38"	514P0D35






POLY HANDLE w/BUILT IN DRAW GRIPS	Cable Range	Part #
	.51 - 1.38"	514P0D35473

Makes connector closures easier.


POLY HANDLE w/CLAMP & BUSHING	Cable Range	Part #
	1.250 - 1.375"	714P0S22
	1.438 - 1.562"	714P0S25
	1.562 - 1.688"	714P0S27
	1.688 - 1.812"	714P0S29

## ANGLES

POLY ANGLE	Angle	Part # Poly	Part # Metal
	30°	514M3	514M7
	70°		Panel mounting only.

METAL ANGLE	Angle	Part #	Notes
	0°	594M0	
	30°	594M3	
	30°	794M3L	
	Oversized 30°	794M3	Mounts on oversize box only. Order with 7T5F0Nxx. See pg 50.
	70°	594M7	


## BOXES

POLY CONDUIT ENTRY w/NPT	Angle	Conduit Size	Part #	Notes
	30°	1/2"	514B3N05	For poly devices only
	30°	3/4"	514B3N07	
	30°	1"	514B3N10	* Interior volume with receptacle installed.
	30°	1 1/4"	514B3N12	


\* 27.7 in<sup>3</sup>


POLY WALL BOX w/ANGLE	Angle	Part #	Notes
	70°	514C7000	70° poly boxes are not drilled. Contact Customer Service if factory drilling is required.
	Ground Bar	51AA089	* Interior volume with receptacle installed.

\* 181.24 in<sup>3</sup>

POLY ANGLE WITH METAL BOX w/NPT	Angle	Conduit Size	Part #	Notes
	70°	1/2"	714C7N05	* Interior volume with receptacle installed.
	70°	3/4"	714C7N07	
	70°	1"	714C7N10	
	70°	1 1/4"	714C7N12	
	70°	1 1/2"	714C7N15	

\* 177.7 in<sup>3</sup>


METAL BOX w/NPT	Angle	Conduit Size	Part #
	0°	1"	7T4F0N10
	0°	1 1/4"	7T4F0N12
	0°	1 1/2"	7T4F0N15
	0°	2"	7T4F0N20

POLY ANGLE WITH METAL BOX w/NPT	Angle	Conduit Size	Part #	Notes
	30°	1"	714C3N10	For metal angle, replace "71" prefix with "79".
	30°	1 1/4"	714C3N12	
	30°	1 1/2"	714C3N15	* Interior volume with receptacle installed.
	30°	2"	714C3N20	



\* 61.0 in<sup>3</sup> Poly Angle


\* 59.4 in<sup>3</sup> Metal Angle

## MISCELLANEOUS ACCESSORIES

FINGER DRAWPLATES	Part #	Notes
	31-6A346	Set of Two (2) Recommended for cord to cord assembly applications, for easier connector closure.

PROTECTIVE INLET/PLUG CAP	Part #	Notes
	31-6A426	For Inlets/Plugs Only.

PADLOCKABLE INLET/PLUG CAP	Part #	Notes
	DS6PC	Poly – For Inlets/Plugs Only.
	DS6MC	Aluminum – For Inlets/Plugs Only. -A155 suffix required to maintain water ingress protection.

SPRING-LOADED PADLOCKABLE INLET/PLUG CAP	Part #	Notes
	31-6A226	For Poly Inlets/Plugs Only.
	39-6A226	For Metal Inlets/Plugs Only.

-A155 suffix required to maintain water ingress protection.

RECEPTACLE LOCKING PIN	Part #	Notes
	LP-843	Requires Padlockable Pawl option (-843) on receptacle.