


ACTAS L260 | L360

SPECIFICATIONS

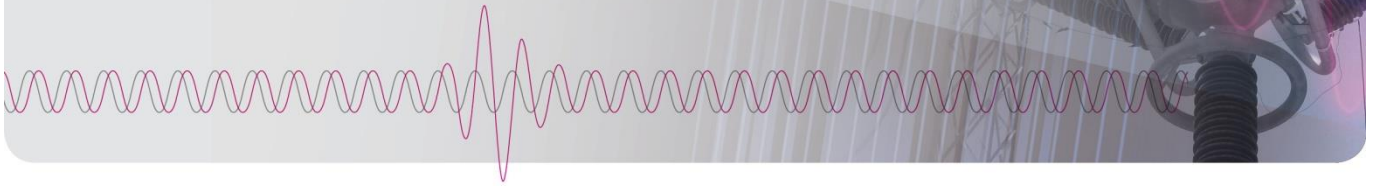

System concept High-precision test systems for function tests on various types of switchgear device, including circuit breakers, disconnectors or earthing switches, regardless of the type of drive unit. The inputs and outputs are connected flexibly via industrial plug connectors, making the test systems particularly suitable for use in development and laboratory environments as well as in production environments. Digital and analog control outputs enable voltage or current sources to be controlled automatically, allowing fully automatic tests. In combination with PROMET, three-pole dynamic resistance measurements can be carried out on up to four interrupter units per pole.

Control outputs Electronic switching outputs (IGBT) for single or three-phase control of the closing and opening coils. All operating sequences can be configured and output in increments of 1 ms.

IGBTs for controlling the release coils	Voltage	300 VAC/DC	
	Current	100 A peak	Intrinsically safe via short-circuit and overload protection
	Time resolution	0.1 ms	
	Accuracy	±0.02 ms	
Binary output	Relay output	30 VDC / 2 A (resistive load)	(max. 220 VDC)
Analog outputs for controlling external voltage sources	Analog outputs to set the desired values and the voltage waveform and to release connected sources.		
	Output range	0...10 VDC / 1 mA	Load impedance >10 kΩ
Power supply to external sensors	Reference voltage for analog sensors	10 VDC	
	Supply voltage for incremental sensors	5 VDC or 10 VDC, can be selected via jumper	

Measurement inputs

General	Recording duration	Max. 13.33 min at 500 Hz, Max. 8 s at 50 kHz		
	Time resolution	0.02 ms		
	Time accuracy	±0.005 ms		
	A/D-conversion	16 bit		
	Accuracy	0.05% of range		
	Analog inputs	Oversampling	200 kHz per measurement channel (physical)	
		Sampling rates	500 Hz...50 kHz, adjustable in steps	
		Activation range	Main contacts <5 Ω Resistive contacts (PIR) >5 Ω...12 kΩ combined with main contact inputs	
		Measuring range close/open coil current	5 ADC / 30 ADC / 100 A peak	
		Coil voltage	300 VAC/DC	
Measuring range motor		20 A RMS/ 50 A RMS/ 100 A peak		
Motor voltage		500 VAC/DC		
Sensor inputs	±20 mA ±10 VDC			
Protection	Galvanic isolations 2.5 kV, device isolated against earth			
	Galvanic isolations 2.5 kV, all measurement inputs isolated against earth			
Binary inputs	Time resolution	0.02 ms		
	Sampling rate	50 kHz		
	Activation range	24...300 VDC, adjustable		
Incremental inputs for digital travel transducers	Auxiliary contacts	External supply, activation range configurable		
	Limit frequency	200 kHz		

Complete system Operation, system control, data storage and evaluation are carried out using a standard, external Windows PC with the ACTAS 2.60 software.

User interface ACTAS system software for the parameterization, execution and evaluation of switchgear tests under Windows 7/8.1/10

Power supply Wide-range power supply unit, nominal range 100...250 VDC and 90...250 VAC; 47...63 Hz
working range: +6% / -10% of the nominal range

Measurement connections Via safety plug connectors located on the back panel

PC interfaces 1 x RJ45 Ethernet
1 x serial RS422

KoCoS interfaces 4 x control of external devices

Environment Operating temperature -10...50°C
Storage temperature -30...70°C
Relative humidity 5...90% non-condensing
Protection IP20

CE conformity EN 61010-1: 2011

Safety requirements for electrical equipment for measurement, control, and laboratory use

EN 61326-1: 2013

Electrical equipment for measurement, control and laboratory use - EMC requirements

Product specifications		ACTAS L260	ACTAS L360
Control outputs	Closing coils	1	3
	Opening coils	2	6
	Relay control outputs	2	6
	Analog control outputs 0...10 VDC	2	4
Analog measurement inputs	Coil current	3 x (I/O)	9 x (I/O)
	Coil/station voltage	1	3
	Motor current via shunt	1	3
	Motor voltage	1	3
	Sensor (dig./inc.)	3	6
	Sensor (+/-10 V)	3	6
	Sensor (0...20 mA)	1	2
Binary measurement inputs	Main and PIR contacts	3 x 2	9 x 2
	Auxiliary contacts	2 x 4	6 x 4
Reference voltage for external sensors		1 x 10 VDC / 200 mA	2 x 10 VDC / 200 mA
Connections for additional equipment	PC	1	1
	PROMET/voltage sources	3	3
	CSW 3	1	1
Housing	Dimensions (W x H x D)	19" housing for rack mounting, 84 HP, 6 U 482.6 mm x 265.9 mm x 242.0 mm	
	Weight	6.3 kg	7.3 kg