




sales@chesscontrols.com

PLUG in and SCREW BRIDGE FOR TERMINAL BLOCKS

Feed-through terminal block - UT 2,5 - 3044076



Feed-through terminal block - UT 4 - 3044102

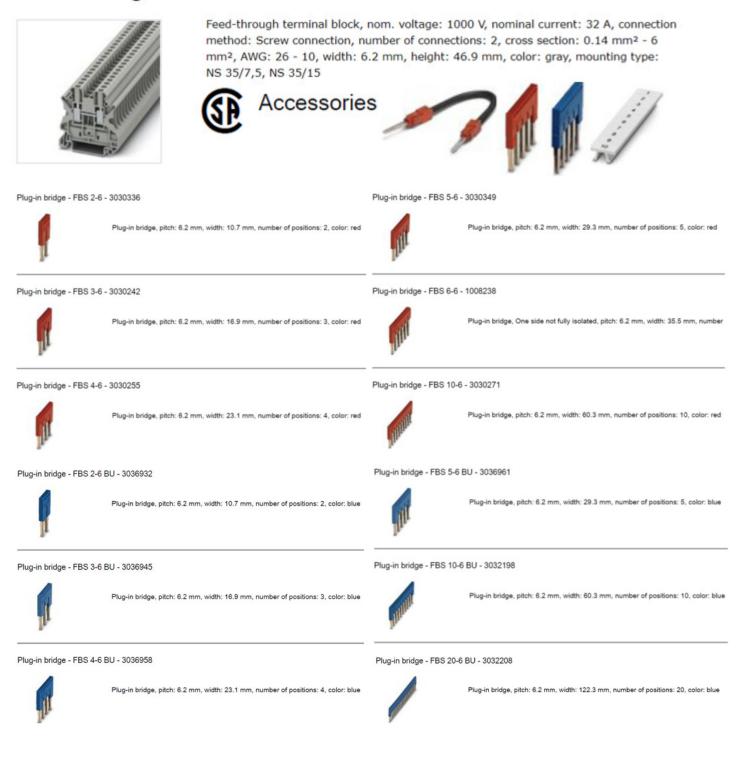

Partition plate - ATP-UT

Test plugs - PS-5

Zack marker strip DIN rail perforated Marker carriers













Feed-through terminal block - UT 6 - 3044131

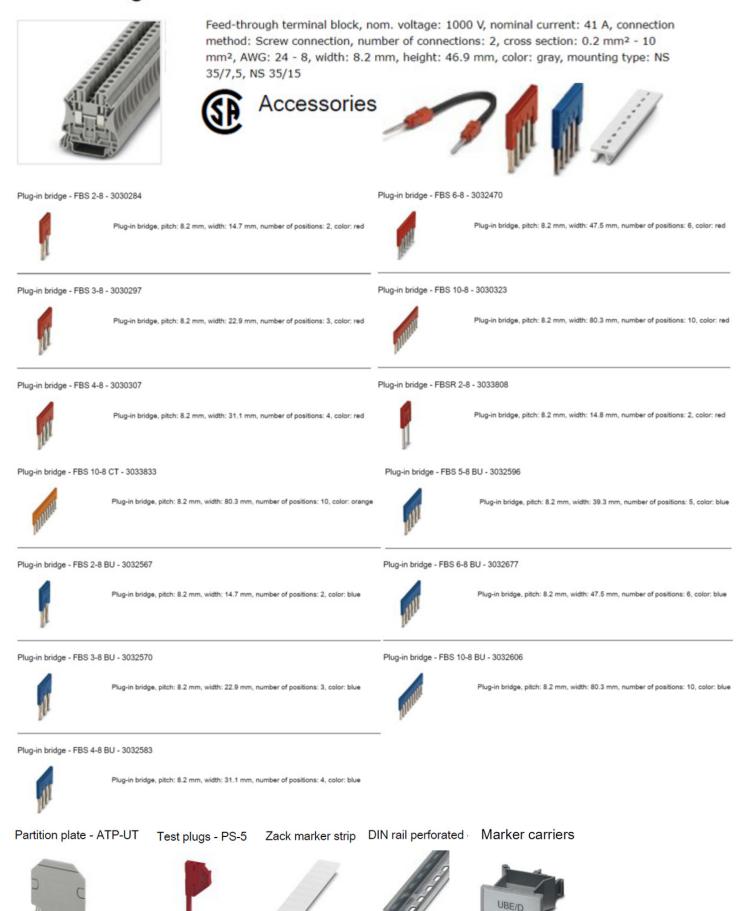

Feed-through terminal block - UT 10 - 3044160

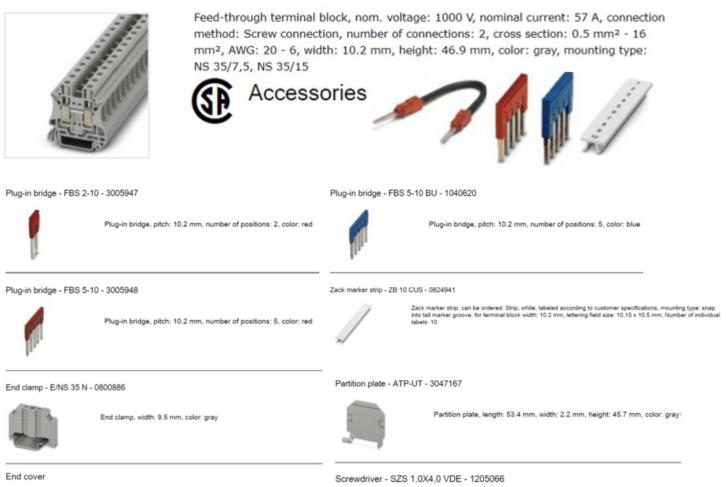

End cover - D-UT 2,5/10 - 3047028



End cover, length: 47 mm, width: 2.2 mm, height: 39.8 mm, color: gray

,...,

Screwdriver, slot-headed, VDE insulated, size: 1.0 x 4.0 x 100 mm,

Feed-through terminal block - UT 16 - 3044199



Feed-through terminal block, nom. voltage: 1000 V, nominal current: 76 A, connection method: Screw connection, number of connections: 2, cross section: 1.5 mm² - 25 mm², AWG: 16 - 4, width: 12.2 mm, height: 54.4 mm, color: gray, mounting type: NS 35/7,5, NS 35/15



Plug-in bridge - FBS 2-12 - 3005950



Plug-in bridge, pitch: 12 mm, number of positions: 2, color: red

Partition plate - TPNS-UK - 0706647



Partition plate, length: 80 mm, width: 2 mm, height: 70 mm, color: gray

Feed-through terminal block - UT 35 - 3044225



Feed-through terminal block, nom. voltage: 1000 V, nominal current: 125 A, connection method: Screw connection, number of connections: 2, cross section: 1.5 mm² - 50 mm², AWG: 16 - 1/0, width: 16 mm, height: 65.1 mm, color: gray, mounting type: NS 35/7,5, NS 35/15



Plug-in bridge - FBS 2-16 - 3005963



Plug-in bridge, pitch: 16 mm, length: 43.7 mm, width: 25.9 mm, number of positions: 2, color: red

Partition plate - TPNS-UK - 0706647



Partition plate, length: 80 mm, width: 2 mm, height: 70 mm, color: gray

Reducing bridge - RB UT 35-10 - 3032168



Reducing bridge, pitch: 13.2 mm, number of positions: 2, color: red

Feed-through terminal block - UK 5 N - 3004362



Feed-through terminal block, nom. voltage: 800 V, nominal current: 32 A, connection method: Screw connection, number of connections: 2, cross section: 0.2 mm² - 6 mm², AWG: 24 - 10, width: 6.2 mm, color: gray, mounting type: NS 35/7,5, NS 35/15, NS 32



Insertion bridge - EB 2- 6 - 0201155

Bridge - ISSBI 10- 6 - 0301505



Insertion bridge, pitch: 6.2 mm, number of positions: 2, color: gray



Bridge, pitch: 6 mm, number of positions: 10, color: silver

Insertion bridge - EB 3- 6 - 0201142

Bridge - LB 10-6 BU - 0202280

Bridge - LB 10-6 GY - 0202358



Insertion bridge, pitch: 6.2 mm, number of positions: 3, color: gray



End clamp - E/NS 35 N - 0800886

Bridge, pitch: 6 mm, number of positions: 10, color: blue

Insertion bridge - EB 10- 6 - 0201139



Insertion bridge, pitch: 6.2 mm, number of positions: 10, color: gray



Bridge, pitch: 6 mm, number of positions: 10, color: gray

Short-circuit connector - KSS 6 - 0301547



Short-circuit connector, pitch: 6 mm, number of positions; 2, color; black



End clamp, width: 9.5 mm, color: gray

Short-circuit connector - KSS 3- 6 - 0309523



Short-circuit connector, pitch: 6 mm, number of positions: 3, color: black

End clamp - E/UK - 1201442

End slowe width 0.5 mm height 05.0 mm



End clamp, width: 9.5 mm, height: 35.3 mm, material: PA, length: 50.5 mm, color: gray

End cover - D-UK 4/10 - 3003020

Switching jumper

Switching jumper - USBRJ 2-7 - 2305538



Switching jumper, number of positions: 2, color: silver



End cover, length: 42.5 mm, width: 1.8 mm, height: 35.9 mm, color: gray

Feed-through terminal block - UK 6 N - 3004524



Feed-through terminal block, nom. voltage: 800 V, nominal current: 41 A, connection method: Screw connection, number of connections: 2, cross section: 0.2 mm² - 10 mm², AWG: 24 - 8, width: 8.2 mm, color: gray, mounting type: NS 35/7,5, NS 35/15, NS 32



Insertion bridge - EB 2- 8 - 0202154

Insertion bridge - EB 10- 8 - 0202138

Insertion bridge - EB 1/3/5/7-8 - 3072340



Insertion bridge, pitch: 8 mm, number of positions: 2, color: gray



Insertion bridge, pitch: 8 mm, number of positions: 10, color: gray

Insertion bridge - EB 3- 8 - 0202141



Insertion bridge, pitch: 8 mm, number of positions: 3, color: gray



Insertion bridge, pitch: 16.4 mm, length: 24 mm, width: 55.4 mm, number of positions: 4, color: gray

Fixed bridge - FB 2- 8-EX - 3029224

gray



Insertion bridge, pitch: 8 mm, number of positions: 4, color: gray

End cover - D-UK 4/10 - 3003020



End cover, length: 42.5 mm, width: 1.8 mm, height: 35.9 mm, color: gray



Partition plate, length: 56 mm, width: 1.5 mm, height: 45.7 mm, color: gray

Insertion bridge, pitch: 16.4 mm, length: 24 mm, width: 39 mm, number of positions: 3,

Fixed bridge - FBI 3- 8 - 0200059



Fixed bridge, pitch: 8 mm, number of positions: 3, color: silver

Î

Fixed bridge, pitch: 8 mm, number of positions: 2, color: silver

Fixed bridge - FBI 4- 8 - 0200046



Fixed bridge, pitch: 8 mm, number of positions: 4, color: silver

Fixed bridge, pitch: 8 mm, number of positions: 10, color: silver



Fixed bridge, number of positions: 4, color: silver

Fixed bridge - FBI 10- 8 - 0203263

Fixed bridge - FB 10- 8 - 0202170

Fixed bridge - FB 4- 8 - 0202183



Fixed bridge, pitch: 8 mm, number of positions: 10, color: silver

Feed-through terminal block - UK 10 N - 3005073



Feed-through terminal block, nom. voltage: 800 V, nominal current: 57 A, connection method: Screw connection, number of connections: 2, cross section: 0.5 mm² - 16 mm², AWG: 20 - 6, width: 10.2 mm, color: gray, mounting type: NS 35/7,5, NS 35/15, NS 32



Fixed bridge - FB 4-10 - 0203182

Insertion bridge - EB 3-10 - 0203328

Insertion bridge - EB 10-10 - 0203137



Insertion bridge, pitch: 10 mm, number of positions: 3, color: gray



Fixed bridge, number of positions: 4, color: silver

Fixed bridge - FB 10-10 - 0203179



Insertion bridge, pitch: 10 mm, number of positions: 10, color: gray



Fixed bridge, pitch: 10 mm, number of positions: 10, color: silver

Insertion bridge - EB 2-10 - 0203153



Insertion bridge, pitch: 10 mm, number of positions: 2, color: gray



Fixed bridge - FB 3-10 - 0203140

Fixed bridge, pitch: 10 mm, number of positions: 3, color: silver

Separating plate - TS-K - 1302215



End cover, length: 42.5 mm, width: 1.8 mm, height: 35.9 mm, color: gray

Feed-through terminal block - UK 16 N - 3006043

Accessories



Feed-through terminal block, nom. voltage: 800 V, nominal current: 76 A, connection method: Screw connection, number of connections: 2, cross section: 2.5 mm² - 25 mm², AWG: 14 - 4, width: 12.2 mm, color: gray, mounting type: NS 35/7,5, NS 35/15, NS 32



Insertion bridge - EB 10-12 - 3006137

Fixed bridge - FBI 2-12 - 0200075



Insertion bridge, pitch: 12 mm, number of positions: 10, color: gray



Fixed bridge, pitch: 12 mm, length: 7.5 mm, width: 21.6 mm, number of positions: 2,

Screwdriver - SZS 1,0X4,0 VDE - 1205066

Fixed bridge - FBI 10-12 - 0203454

Fixed bridge, pitch: 12 mm, length: 7.5 mm, width: 118.4 mm, number of positions: 10

Screwdriver, slot-headed, VDE insulated, size: 1.0 x 4.0 x 100 mm





End cover, length: 42.5 mm, width: 1.5 mm, height: 54 mm, color: gray

Partition plate - ATP-UK - 3003224

Partition plate, length: 56 mm, width: 1.5 mm, height: 45.7 mm,

Feed-through terminal block - UK 35 N - 3074130



Feed-through terminal block, nom. voltage: 1000 V, nominal current: 125 A, connection method: Screw connection, number of connections: 2, cross section: 10 mm² - 35 mm², AWG: 8 - 2, width: 16 mm, color: gray, mounting type: NS 35/7,5, NS 35/15



Insertion bridge - EB 2-15 - 0203166

Insertion bridge, pitch: 15.25 mm, number of positions: 2, color: gray



Fixed bridge, pitch: 15 mm, number of positions: 2, color: silver



Switching jumper - SBH 2-15 - 0205232



Fixed bridge - FBI 2-15 - 0201333




Switching jumper, pitch: 15 mm, number of positions: 2, color: silver



Sealable cover profile, for mounting on NS 35/7.5 DIN rail and for fixing the cover profile AP 3 M5, space requirement: 13 mm

Fuse modular terminal block - UT 4-HESI (5X20) - 3046032

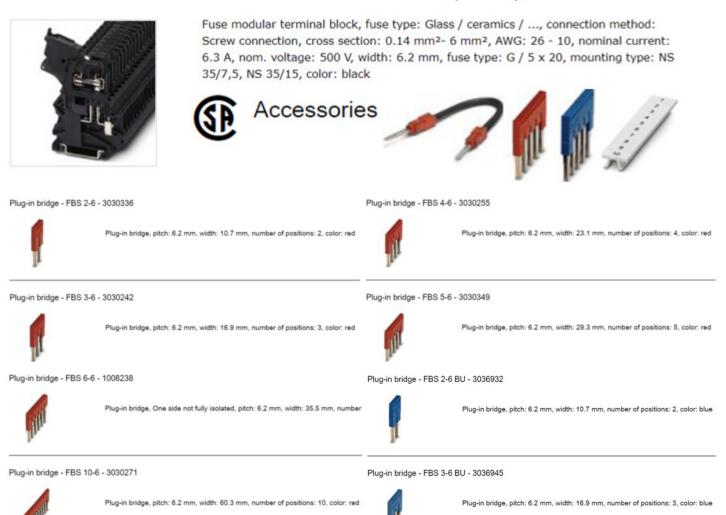

Fuse modular terminal block - UT 6-HESILED 24 (6,3X32) - 3046414



Plug-in bridge - FBS 2-8 - 3030284

Lever-type fuse terminal block, black, for 6.3 x 32 mm G fuse inserts, with LED for 24 V DC $\,$





Plug-in bridge, pitch: 8.2 mm, width: 14.7 mm, number of positions: 2, color: red

Plug-in bridge - FBS 5-8 - 3030310



Plug-in bridge, pitch: 8.2 mm, width: 39.3 mm, number of positions: 5, color: red

Plug-in bridge - FBS 3-8 - 3030297

Plug-in bridge - FBS 4-8 - 3030307

Plug-in bridge - FBS 3-8 BU - 3032570

Plug-in bridge - FBS 10-8 - 3030323



Plug-in bridge, pitch: 8.2 mm, width: 80.3 mm, number of positions: 10, color: red

Plug-in bridge - FBS 6-8 - 3032470



Plug-in bridge, pitch: 8.2 mm, width: 47.5 mm, number of positions: 6, color: red

Plug-in bridge - FBS 4-8 CT - 3033832



Plug-in bridge, pitch: 8.2 mm, width: 31.1 mm, number of positions: 4, color: orange

Plug-in bridge - FBS 4-8 BU - 3032583



Plug-in bridge, pitch: 8.2 mm, width: 31.1 mm, number of positions: 4, color: blue

Plug-in bridge, pitch: 8.2 mm, width: 22.9 mm, number of positions: 3, color: red

Plug-in bridge, pitch; 8.2 mm, width; 31.1 mm, number of positions; 4, color; red

Plug-in bridge, pitch: 8.2 mm, width: 22.9 mm, number of positions: 3, color: blue


Plug-in bridge - FBS 10-8 CT - 3033833

Plug-in bridge, pitch: 8.2 mm, width: 80.3 mm, number of positions: 10, color: orange

Knife disconnect terminal block - UT 4-MT - 3046139



Knife disconnect terminal block, nom. voltage: 500 V, nominal current: 20 A, connection method: Screw connection, cross section: 0.14 mm² - 6 mm², AWG: 26 - 10, length: 57.8 mm, width: 6.2 mm, color: gray, mounting: NS 35/7,5, NS 35/15







Plug-in bridge - FBS 4-6 - 3030255



Plug-in bridge, pitch: 6.2 mm, width: 23.1 mm, number of positions: 4, color: red



Plug-in bridge, pitch: 6.2 mm, number of positions: 3, color: red



Plug-in bridge - FBS 6-6 - 1008238



Plug-in bridge, pitch: 6.2 mm, width: 29.3 mm, number of positions: 5, color: red

Plug-in bridge, One side not fully isolated, pitch: 6.2 mm, width: 35.5 mm, number of positions: 6

Plug-in bridge, pitch: 6.2 mm, width: 23.1 mm, number of positions: 4, color: blue





Plug-in bridge, pitch: 6.2 mm, number of positions: 4, color: red

Plug-in bridge - FBSR 5-6 - 3001596

Plug-in bridge - FBS 10-6 BU - 3032198




Plug-in bridge, pitch: 6.2 mm, number of positions: 5, color: red

Plug-in bridge - FBS 4-6 BU - 3036958




Plug-in bridge, pitch: 6.2 mm, width: 60.3 mm, number of positions: 10

Knife disconnect terminal block - UT 6-MT - 3064069

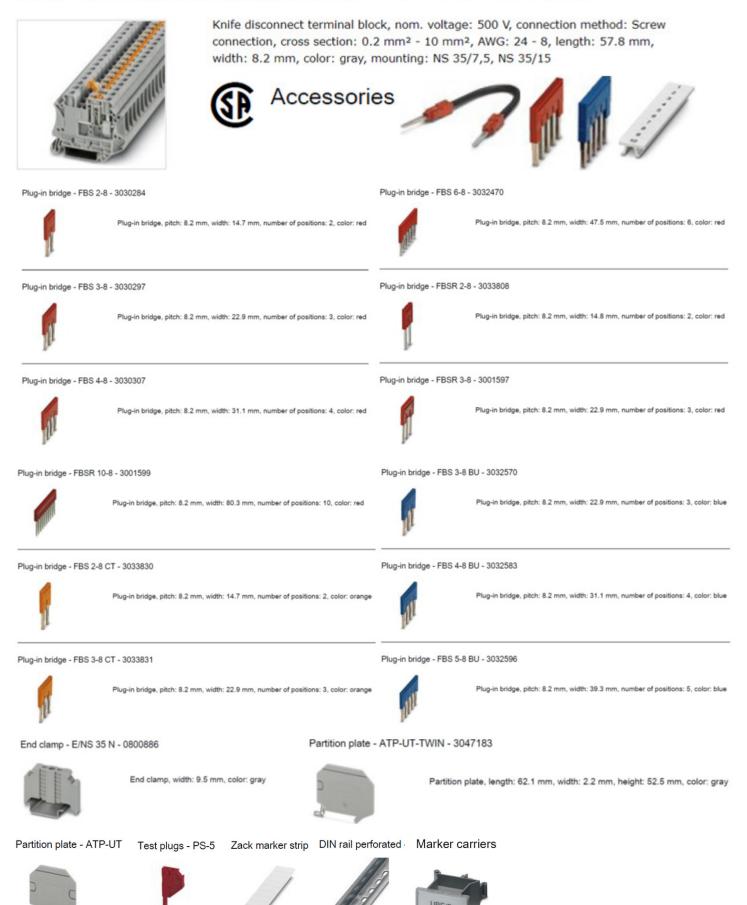

Feed-through terminal block - UT 4-TWIN - 3044364

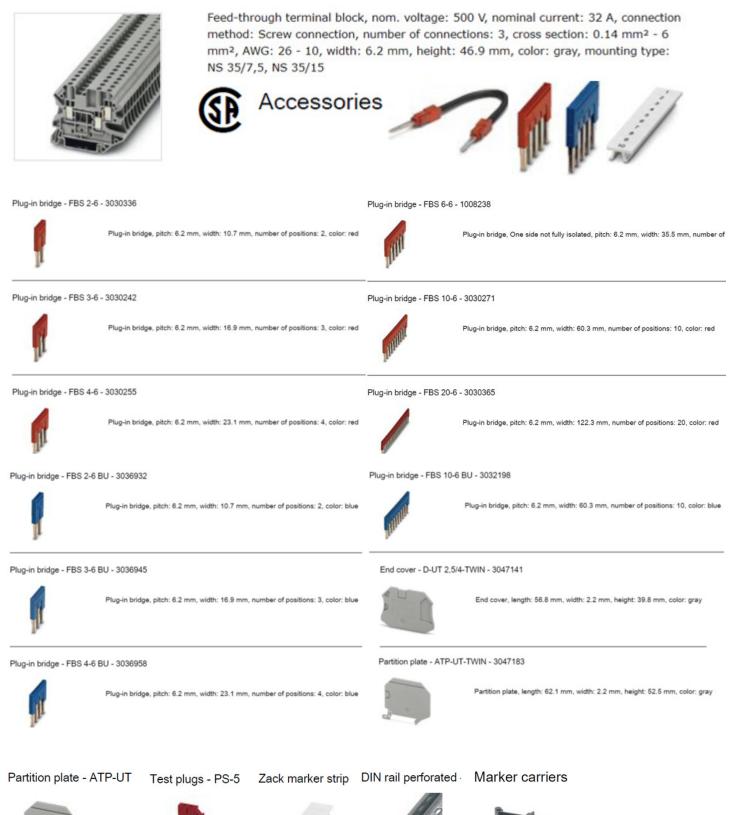











Feed-through terminal block - UT 2,5-TWIN - 3044513



Feed-through terminal block, nom. voltage: 500 V, nominal current: 24 A, connection method: Screw connection, number of connections: 3, cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, width: 5.2 mm, height: 46.9 mm, color: gray, mounting type: NS 35/7,5, NS 35/15

Accessories



Plug-in bridge - FBS 20-5 - 3030226



Plug-in bridge, pitch: 5.2 mm, number of positions: 20, color: red

Plug-in bridge - FBS 4-5 - 3030187

Plug-in bridge - FBS 3-5 - 3030174



Plug-in bridge, pitch: 5.2 mm, length: 22.7 mm, width: 19.4 mm, number of positions: 4, color; red

Plug-in bridge, pitch: 5.2 mm, length: 22.7 mm, width: 14.2 mm, number of positions: 3, color: red

Plug-in bridge - FBS 5-5 - 3030190

Plug-in bridge, pitch: 5.2 mm, length: 23 mm, width: 24.6 mm, number of positions: 5, color: red





Plug-in bridge, pitch: 5.2 mm, length: 22.7 mm, width: 50.6 mm, number of positions: 10, color: red

Plug-in bridge - FBS 2-5 BU - 3036877



Plug-in bridge, pitch: 5.2 mm, number of positions: 2, color: blue





Plug-in bridge, pitch: 5.2 mm, number of positions: 50, color: red

Plug-in bridge - FBSR 2-5 - 3033702



Plug-in bridge, pitch: 5.2 mm, number of positions: 2, color: red

Plug-in bridge - FBS 5-5 BU - 3036903

Plug-in bridge - FBS 10-5 BU - 3036916



Plug-in bridge, pitch: 5.2 mm, number of positions: 5, color: blue

Plug-in bridge - FBS 3-5 BU - 3036880

Plug-in bridge - FBS 4-5 BU - 3036893

End cover - D-UT 2,5/4-TWIN - 3047141



Plug-in bridge, pitch: 5.2 mm, number of positions: 3, color: blue



Plug-in bridge, pitch: 5.2 mm, number of positions: 10, color: blue

Plug-in bridge - FBS 20-5 BU - 3036929



Plug-in bridge, pitch: 5.2 mm, number of positions: 20, color: blue

Partition plate - ATP-UT-TWIN - 3047183




End cover, length: 56.8 mm, width: 2.2 mm, height: 39.8 mm, color: gray

Plug-in bridge, pitch: 5.2 mm, number of positions: 4, color: blue



Partition plate, length: 62.1 mm, width: 2.2 mm, height: 52.5 mm, color: gray

Feed-through terminal block - PT 4 - 3211757

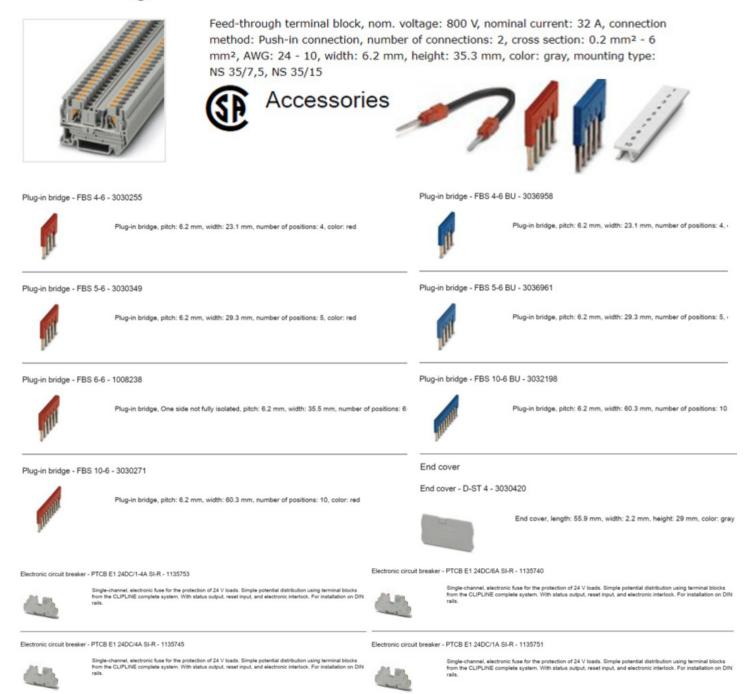

Phoenix Contact have a large selection of plug-in / screw in bridges to interconnect / jumper terminal blocks. This document does not include all available options. For more information or for assistance in selecting the terminal block marker for your specific need, contact Chess Controls at 705 682 2828.

Marker carriers - UBE - 0800310



Terminal strip marker carriers for marking terminal groups, for end bracket E/UK or end clamp E/U, lettering field size: 40 x 17 mm



Terminal strip marker carrier for marking groups of terminals, for mounting on NS 32 or NS 35/7,5 terminal strips, marking field size: 40 x 17 mm

MARKING ACCESSORIES